



## Carbide Tipped Rip/Crosscut Blade, Thin Kerf, Alternate Top Bevel



For general ripping and crosscutting along and across the grain of wood, plywood, and particle board. Micro-grain titanium carbide teeth. Non-adhesive black coating.

Thick carbide teeth. Premium quality, made in Germany.


Features & Benefits:

- Long & thick carbide teeth (10mm x 2.5mm on 24T, 40T, 60T blades) for 15-20 sharpenings.
- Micro-grain titanium carbide for longer service life.
- Non adhesive black coating for easy cleaning and smoother operation.
- Premium quality stiff plate for true cutting even under load.
- Guaranteed quality



Tool no.	Dia.	Teeth	Kerf	Bore
WP1024CLA*	10"	24	.102" (2.6mm)	5/8"

\*Chip Limitation Design

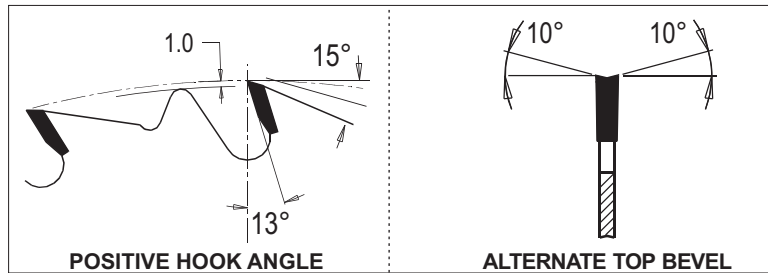


## Carbide Tipped Cut Off Saw Blades, Thin Kerf, Alternate Top Bevel



For general crosscutting along and across the grain and trimming of wood, plywood, and particle board. Micro-grain titanium carbide teeth. Non-adhesive black coating.

Thick carbide teeth. Premium quality, made in Germany.

Tool no.	Dia.	Teeth	Kerf	Bore
WP864A	8"	64	.102" (2.6mm)	5/8"
WP1040A	10"	40	.102" (2.6mm)	5/8"
WP1060A	10"	60	.102" (2.6mm)	5/8"
WP1080A	10"	80	.102" (2.6mm)	5/8"

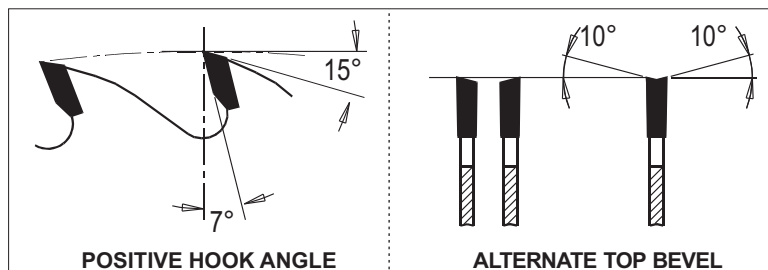



## Carbide Tipped Combination Saw Blade, Thin Kerf, Chip Limiter




All purpose saw blade for ripping and cutting along and across the grain. For easy feed in wood, plywood and particle board. Micro-grain Titanium carbide teeth. Non-Adhesive black coating. Thick carbide teeth. Premium quality. Made in Germany.

Made in Germany

Tool no.	Dia.	Teeth	Kerf	Bore
WP1050COM*	10"	50	.110" (2.8mm)	5/8"

\*Chip Limitation Design

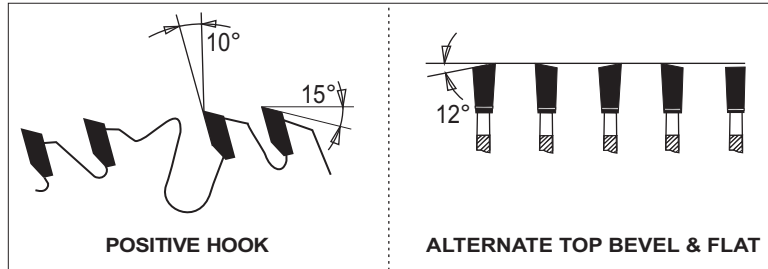


## Carbide Tipped Saw Blades for Solid Wood & Laminate, Triple Chip (TCG), Thin Kerf



For cutting solid woods against the grain and single sided laminated boards. Thick carbide teeth made of Micro-grain titanium for exceptional durability and ultimate performance. Blade surface is coated with Non adhesive black coating for smooth cutting. Excellent cutting quality. Made in Germany

Tool no.	Dia.	Teeth	Kerf	Bore
WP1060T	10"	60	.102" (2.6mm)	5/8"
WP1080T	10"	80	.102" (2.6mm)	5/8"

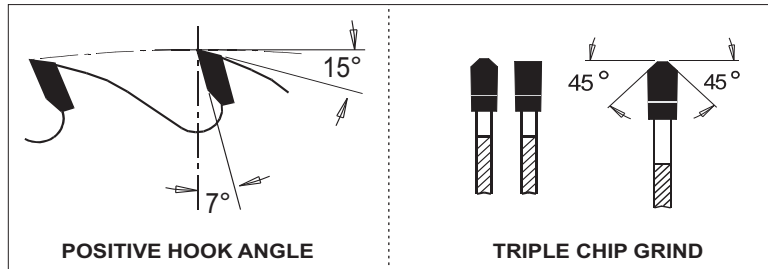


SAWING

## Carbide Tipped Miter Saw Blade, Thin Kerf



For cutting across and along the grain in wood, plywood, hardboard and particle board. Used in sliding, compound, miter saws and radial arm saws. Micro-grain Titanium carbide teeth. Non-Adhesive black coating. Thick carbide teeth. Premium quality. Made in Germany.

Tool no.	Dia.	Teeth	Kerf	Bore
WP1270A	12"	70	.110" (2.8mm)	1"

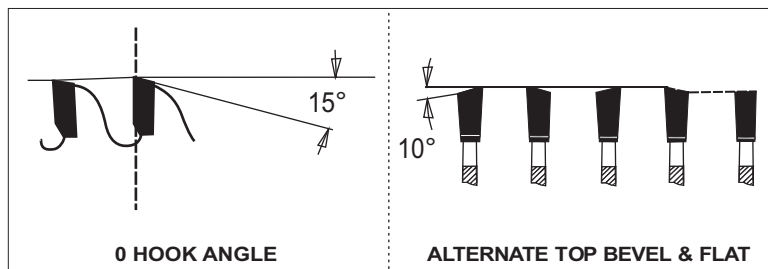



## Carbide Tipped Dado Set - For Wood, 1/4" to 1" Kerf



This 8" Carbide tipped safety Dado set will produce flat bottom grooves with splinter free edges in natural woods. Fully versatile, this dado set can be set from 1/4" to 1" widths at 1/16" increments. Micro increments widths are made with the provided shims. Positive angle tooth design, coupled with anti kick back body, will result in safe and easy feed while protecting your machine from overload.

This dado set has all the features of an expensive dado, at a very attractive price.

### The set consists of:

- |                          |                          |
|--------------------------|--------------------------|
| 2 pc dado blades 1/8"    | 1 pc 1/4" thick chipper  |
| 2 pc 1/8" thick chipper  | 1 pc 3/32" thick chipper |
| 1 pc 1/16" thick chipper | 14 pc shim set           |

Instruction manual.

The dado set is protected in an Aluminum case with foam insert, for safe keeping.

### Features & benefits:

- Thick & long carbide teeth for many sharpenings.
- C4 carbide will hold sharp edge for longer tool life.
- Non adhesive black coating for easy cleaning
- Non adhesive black coating for easy cleaning
- 3/32" chipper for small increments to accommodate actual wood sizes.
- Solid hub dado blades for maximum stability.
- Very economical.

Tool no.	Dia.	Teeth	Kerf	Bore
WP824DCL	8"	24	1/4" - 29/32"	5/8"



## Dado Shims


Set of 14 Dado Shims. Made from durable plastic, these shims are color coded for different thickness.

Tool no.	Description	O.D.	I.D.
S14	Set consists of	2 3/4"	5/8"
	4 shims .002" Clear		
	2 shims .006" Blue		
	4 shims .012" Red		
	4 shims .020" White		
S14-1	Set consists of		
	4 shims .002" Gold	2 3/4"	1"
	2 shims .006" Yellow		
	4 shims .012" Clear		
	4 shims .020" White		





## Carbide Tipped Saw Blades - Grooving / Door Jam For Hand Held Grinders




A **door jamb** is the vertical section of a door frame, which acts as a support for the remainder of the frame, as well as the door itself. Each frame has two jambs. The hinge jamb is the side where the hinges are installed, and the strike jamb is the side where the locking mechanism latches into the strike. The jambs are also used to mount the frame to the surrounding wall. The horizontal member that connects the two jambs is called the head.

The material used to make a door jamb is largely determined by where it will be used. In most residential settings, the door frame is made of wood. It is typically hidden by casing or trim, so the type and finish of the wood is generally not important. For commercial uses, hollow metal door jambs are most common, and are made of cold-rolled steel for interior applications, or galvanized steel for exterior use. Some architects may specify frames made of stainless steel or aluminum to provide a nicer finish, while fiberglass frames are used for their durability and weather-resistance.

It is quite a challenge to cut the undercut door jambs flush or along the walls when installing carpet or tile. That is exactly why the Dimar Door Jamb Blade will save you time by doing "hot cuts" on the job.

Tool no.	Dia.	Teeth	Kerf	Bore
4 3/4-12 ATB	4 3/4"	12	.110" (2.8mm)	7/8"
4 3/4-24 ATB	4 3/4"	24	.110" (2.8mm)	7/8"

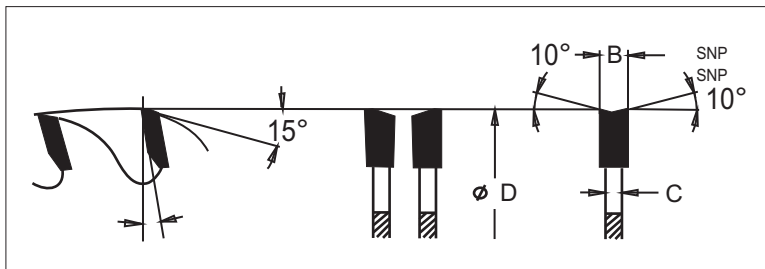


## Carbide Tipped Saw Blades for Portable or Stationary circular saw machines



Alternate Top Bevel (ATB) tooth grind for crosscutting or ripping. Thin kerf design for fast, smooth cutting that will require less power from your saw machine.

**Laser Cut**  
Laser cut expansion slots for reduced vibration

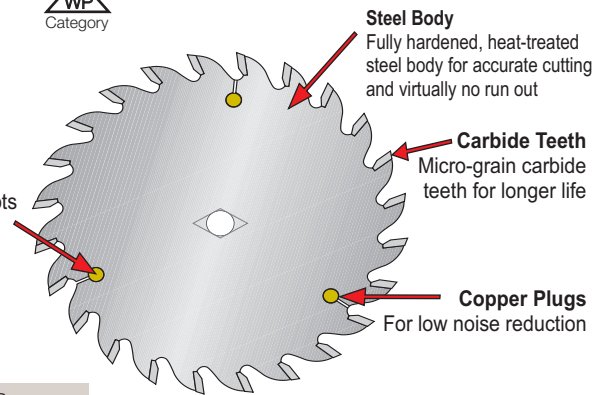

Tool no.	Dia.	Teeth	Kerf	Bore
WP71440	7 1/4"	40	3.0mm	5/8"
*WP71240X	7 1/2"	40	2.4mm	5/8"

\* Fits Makita Slide compound saw LS0711Z. For Wood

